


Fresh

Wall vent TL80F dBs

Artno 638052

• Noise-reducing • Infinitely adjustable •
Condensation-protecting design • Distribution pattern
for underfloor heating • Built-in basic flow • Multiple
filter options

**Sound-absorbent wall vent for wall
mounting. Designed for continuous
ventilation of homes.**

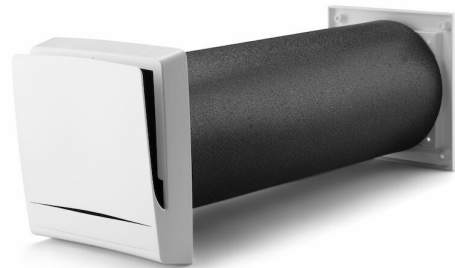

Technical data

Duct size nominal Ø (mm)	80
Duct Length	360
Unpackaged Product Width (mm)	435
Unpackaged Product Height (mm)	168
Unpackaged Product Depth (mm)	152
Material	Plastic
Plastic Material detail	ABS, PS
Etim Code	EC011497

Description

Wall vent with a very comfortable distribution pattern designed for underfloor heating

When delivered as an assembly, the vent comes with a filter, sound-absorbent lead-through and exterior wall grille.

The lead-through consists of a sound-absorbent pipe and an external grille with adapter.

The sound-absorbent pipe can be easily cut to the right length using a standard knife. The standard pipe length is 360 mm.

Internal vent part:

The internal vent part has a condensation-protecting design, filter and a precision shutter for infinitely adjustable setting of flow. The shutter control is hidden under the cover. The distribution pattern has been carefully developed to suit underfloor heating systems.

The vent releases the air upwards and to the sides.

Mixture with room air is very effective. Very cooled air reaches a comfortable temperature just a few decimetres from the device.


Installation/positioning:

The vent should be positioned high up on the wall. If there is a radiator, it is best to try to position the vent above this. With this positioning, you utilise the convection flow and achieve the best comfort level. The vent works extremely well with underfloor heating and is designed for this.

Operation/maintenance:

To ensure good air quality and maintained flow, the filter should be cleaned/replaced 1–2 times/year. The standard filter can be washed in a mild soap solution. The pollen and environmental filters must be replaced. The filter is fitted behind the cover, which is easily removed by pulling it straight out from the vent chassis.

Accessories



**Filter TL-F/P
and D-800/D-
1200 standard
3-pcs**

Artno 183293



**Filter TL-F/P
pollen 3-pcs**

Artno 183294



Chuck D32-210

Artno 804046



**Chuck
extender D32-
210**

Artno 804048



Hole saw D127

Artno 804044



**External grille
#150 black**

Artno 181706



**External grille
#150 röd**

Artno 181705



**External grille
#150 grey**

Artno 181707



**Insect net 150
DIY**

Artno 664004



**Filterholder
TL-F complete**

Artno 193278

Artno 858050